


# AFL3-MF-RFID-KIT

13.56MHz Mifare RFID Reader Kit

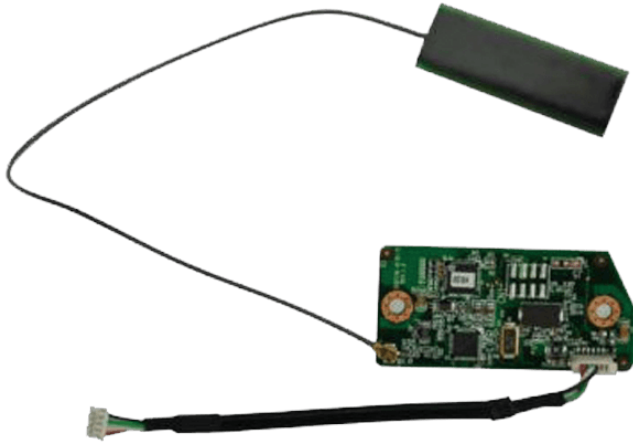

## Features

- \* Reading distance: up to 30mm
- \* Frequency: 13.56 MHz
- \* Support ISO14443A read, ISO15693 read/write ,Mifare DESFire EV1 8k
- \* USB interface
- \* Support RFID software development tool
- \* AFL3-MF-RFID-KIT01 for AFL3-W07A-BT
- \* AFL3-MF-RFID-KIT02 for AFL3-BT and AFL3-AL series, except to AFL3-W07A

## Specifications

|                       |  |
|-----------------------|--|
| Environment           |  |
| Operating Temperature | 0°C ~ 50°C   |
| Storage Temperature   | -10°C ~ 70°C   |
| General               |  |
| Dimensions            | 22mmX 50mm X7mm  |
| Description           |  |
| Description           | * AFL3-MF-RFID-KIT01 for AFL3-W07A-BT                                    |
|                       | * AFL3-MF-RFID-KIT02 for AFL3-BT and AFL3-AL series, except to AFL3-W07A |
| Interface             |  |
| Interface             | USB 2.0 full speed with 3.3/5V logic levels                              |
| Key Features          |  |
| Key Features          | * Reading distance: up to 30mm   |
|                       | * Frequency: 13.56 MHz   |
|                       | * Support ISO14443A read, ISO15693 read/write ,Mifare DESFire EV1 8k     |
|                       | * USB interface  |
|                       | * Support RFID software development tool                                 |

## Ordering Information

|                        |  |
|------------------------|--|
| AFL3-MF-RFID-KIT02-R10 | AFL3 PPC Mifare RFID reader kit, for AFL3-BT / AFL3-AL / AFL3-ULT3 , R10 |
| AFL3-MF-RFID-KIT01-R10 | AFL3 PPC Mifare RFID reader kit, for AFL3-W07A-BT , R10                  |