


# iUCOM-4R

USB Module supports four RS-232/422/485 Port (RJ-45), RoHs

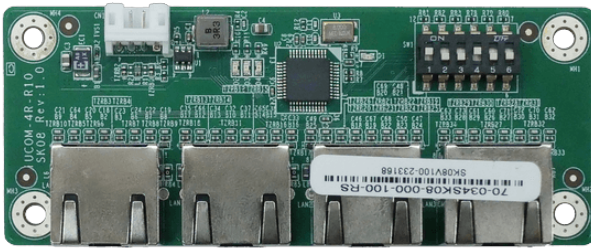

## Features

- » Quad-port RS-232/422/485
- » 1024 bytes transmit / 512 bytes receive FIFO
- » High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- » Baud rate supports 115.2K, max. up to 6M

## Specifications

|                          |   |
|--------------------------|---|
| Form Factor              |   |
| Form Factor              | USB2.0 (1*4pin, P=2.0)                      |
|                          | * USB Bridge to Quad Serial Port: WCH CH344 |
|                          | * Buffer/Transceiver Series: Fintek 81435   |
| Physical Characteristics |   |
| Dimensions (LxWxH) (mm)  | 95mm * 40mm                                 |
| I/O Interface            |   |
| I/O Interface            | 4 x External RS-232/422/485 : RJ-45         |
| Environment              |   |
| Operating Temperature    | 0°C – 60°C                                  |
| Storage Temperature      | -30°C – 70°C                                |
| Humidity                 | 5% ~ 95%, non-condensing                    |
| Certifications           |   |
| Safety & EMC             | CE/FCC compliant                            |

## Ordering Information

|              |  |
|--------------|--|
| iUCOM-4R-R10 | USB Module supports Quad RS-232/422/485 Port(RJ45), RoHs |
|--------------|--|

## Packing List

|                               |                       |
|-------------------------------|-----------------------|
| 1 x iUCOM-4R peripheral board | 1 x QIG               |
| 1 x USB Cable(P=2.0)          | 1 x USB Cable(P=2.54) |