


IMBA-BTL-H610

ATX motherboard supports LGA1700 socket 支持 12th/13th/14th Gen Intel® Core™ processors (Alder Lake-S / Raptor Lake-S) and Intel® Core™ Processors (Series 2) (Bartlett Lake-S)

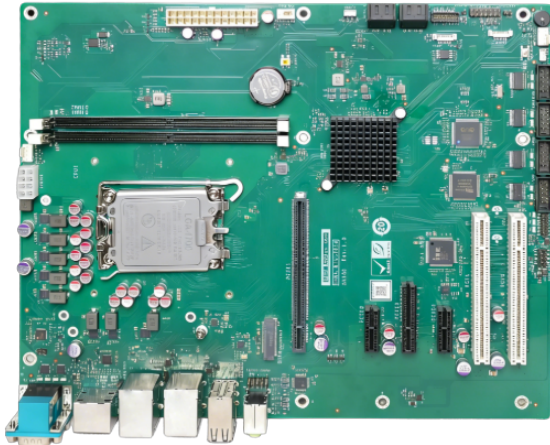

Features

- » LGA1700 socket supports 12th/13th/14th Gen Intel® Core™ processors (Alder Lake-S / Raptor Lake-S) and Intel® Core™ Processors (Series 2) (Bartlett Lake-S) up to 65W TDP
- » Two 288-pin 5600 MHz Dual-Channel DDR5 SDRAM Unbuffered DIMMs supported up to 96GB
- » Triple independent display via HDMI™, DP and iDPM
- » Support Dual Intel® I226V/I219 LM 2.5GbE controller
- » Support PCIe Gen4 x1, PCIe Gen4 x4, PCIe Gen4 x16 and PCI expansion

Specifications

| | |
|-----------------------------|--|
| Form Factor | |
| Form Factor | ATX |
| System | |
| CPU | LGA1700 socket supports 12th/13th/14th generation Alder Lake-S/Raptor Lake-S/Bartlett Lake Intel® Core™ i9/i7/i5/i3/Pentium®/Celeron® Processor (up to 65W TDP CPU) |
| Chipset | Intel® H610/H610E |
| Memory | Two 288-pin 5600 MHz Dual-Channel DDR5 SDRAM Unbuffered DIMMs supported up to 96GB |
| Cooling method / System Fan | 1 x CPU fan connector (1x4 pin) 1 x System fan connector (1x4 pin) |
| Physical Characteristics | |
| Dimensions (LxWxH) (mm) | 244mm x 305mm |
| Net Weight | GW: 1200g / NW: 700g |
| Storage | |
| Storage | 4 x SATA : 6Gb/s |
| I/O Interface | |
| Display Output | 1 x Display Port : 1.4 (up to 4K@60Hz) 1 x HDMI™ : 1.4 (up to 4K@30Hz) 1 x iDPM : 3040 slot (only for IEI eDP/LVDS/VGA module) |
| Ethernet | 2 x LAN - LAN1: Intel® I219LM controller LAN2: Intel® I226V 2.5GbE controller |
| Audio | 1 x HD Audio : Realtek ALC888S HD codec 2 x Audio Jack (Line-out, Mic-in) on rear IO 1 x Analog audio (2x5 pin) |
| I/O Interface | 1 x DIO : 12-bit digital I/O (2x7 pin) 2 x External RS-232/422/485 : RS-485 support AFC 4 x External USB 2.0 : Type-A 2 x External USB 3.2 Gen1x1 : Type-A, 5Gb/s |

| | |
|-----------------------|--|
| | 2 x External USB 3.2 Gen2x1 : Type-A, 10Gb/s |
| | 4 x Internal RS-232 : 2x5 pin, P=2.54 |
| | 2 x Internal USB 2.0 : 2x4 pin, P=2.00 |
| Expansion | 2 x PCI Slot |
| | 2 x PCIe x1 : Gen3 x 1 |
| | 1 x PCIe x16 : Gen4 x 16 |
| | 1 x PCIe x4 : Gen3 x 4 open-end |
| Power | |
| Power Consumption | TBD |
| Power Supply | ATX/AT power supply |
| | Support AT/ATX mode |
| | ErP/EuP Compliant |
| Environment | |
| Operating Temperature | -10°C ~ 60°C |
| Storage Temperature | -30°C ~ 70°C |
| Humidity | 5% ~95%, non-condensing |

Ordering Information

| | |
|-------------------|--|
| IMBA-BTL-H610-R10 | ATX motherboard supports LGA1700 12/13/14th Intel® Core™ i9/i7/i5/i3, Celeron® and Pentium® processor & Intel Core (Series 2)(Bartlett Lake S), DDR5, Triple displays, dual LAN, M.2, USB 3.2, SATA 6Gb/s and RoHS |
|-------------------|--|

Packing List

| | |
|---|-------------------|
| 1 x IMBA-BTL-H610 single board computer | 1 x I/O Shielding |
| 1 x SATA cable | 1 x QIG |