


NANO-9452

EPIC SBC with Intel® Core™ 2 Duo/Core™ Duo/Solo Processor

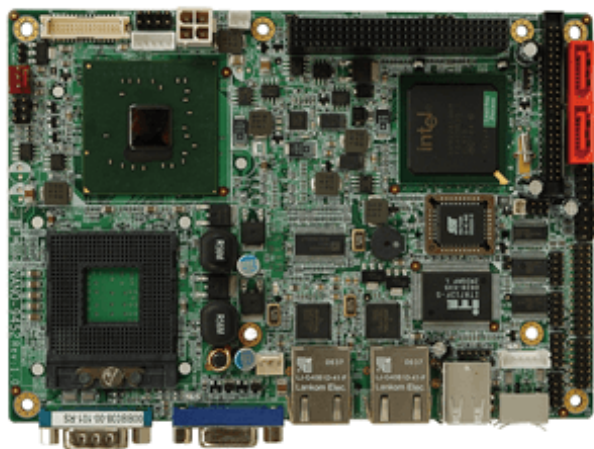

Features

- » Support Intel® Core™ 2 Duo, Core™ Duo/Solo processor with 667 MHz FSB
- » VGA integrated in Intel® 945GME supports 1080i HDTV-out, 18/24-bit dual-channel LVDS
- » DDR2 667/533/400 MHz SO-DIMM socket supports up to 2 GB
- » Dual Broadcom BCM5787M PCIe GbE chipset
- » IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

Display	Display
System	CPU
Chipset	Intel® 945GME + ICH7M
Memory Max.	1 x 200-pin 400/533/667 MHz
	2 GB DDR2 SO-DIMM (system max. 2GB)
CPU Socket	Socket M
I/O Interface	Ethernet
Digital I/O	8-bit digital I/O (4-bit input/4-bit output)
Audio	AC-KIT-892HD-R10
	AC-KIT08R
I/O Interface	3 x RS-232
	1 x RS-232/422/485
	6 x USB 2.0
	1 x LPT
	1 x Infrared interface
	1 x PS/2 for KB/MS
Power	Power consumption
Environment	Operating Temperature
Humidity	5% ~ 95% non- condensing
Option	iRIS
Storage	Storage
Expansion Slots	Expansion Slots
FSB	FSB
Watchdog Timer	Watchdog Timer
CPU Cooler	CPU Cooler
I/O Interface	I/O Interface
1 x LPT	
3 x RS-232	
1 x RS-422/485	

Ordering Information

NANO-9452-R40	EPIC SBC Intel Core Duo FSB667Mhz with CRT/LCD,Dual PCIE-GbE,SATA and Audio,RoHS
---------------	--