


# PIC0e-HM650

Half-size PCIe CPU Card supports Socket 988B Intel® Mobile Core™ i7/i5/i3 or Celeron® CPU with Intel® HM65

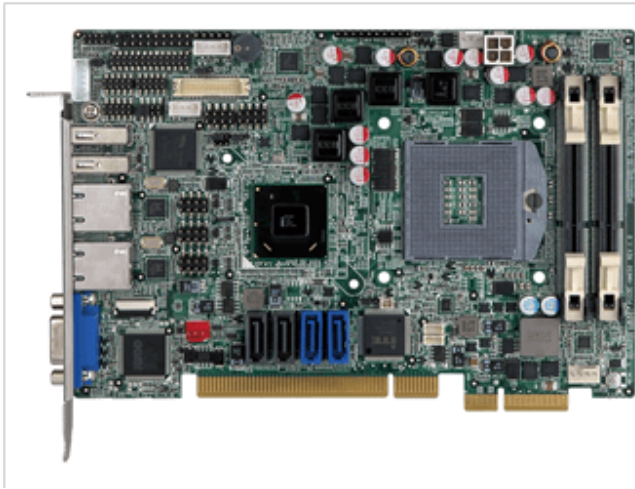

## Features

- » Half-size PCIe CPU card supports Socket G2 32nm Intel® Core™ i7/i5/i3 or Celeron® processor
- » Up to 16 GB 1333/1066 MHz dual-channel DDR3 SDRAM
- » Supports 18/24-bit dual-channel LVDS and analog CRT output
- » High-speed I/O interface provided through the 2nd gen PCIe add-on card and SATA 6Gb/s connectors
- » Rich media acceleration for hardware encoding and decoding
- » TPM V1.2 hardware security provided by the TPM module
- » IEI One Key Recovery solution allows you to create raid OS backup and recovery

## Specifications

System	
CPU	Intel® Mobile Core™ i7/i5/i3/Celeron® CPU
Chipset	Intel® HM65
Memory Max.	Two 204-pin 1333/1066 MHz dual-channel DDR3 SO-DIMMs supported (system max. 16GB)
CPU Socket	Socket 988B
I/O Interface	
Ethernet	LAN1: Realtek RTL8111E GbE controller with ASF 2.0 support LAN2: Realtek RTL8111E GbE controller
Digital I/O	8-bit digital I/O (4-bit input, 4-bit output)
Display	Dual display supported 1 x VGA (up to 2048 x 1536 @75Hz) 1 x 18/24-bit dual-channel LVDS (up to 1920 x 1200 @60Hz)
Audio	Supports 7.1 channel HD audio by IEI AC-KIT-892HD-R10 kit
I/O Interface	
I/O Interface	2 x Internal RS-232 1 x Internal RS-422/485 6 x Internal USB 2.0 1 x KB/MS 1 x LPT 2 x USB 2.0
Power	
Power consumption	5V@3.99A, 12V@0.43A, Vcore_12V@3.80A, 5VSB@0.06A (2.70GHz Intel® Core™ i7-2620M with two 2GB 1333MHz DDR3 memory)
Environment	
Operating Temperature	-10°C ~ 60°C
Humidity	10% ~ 95%, non-condensing
Storage	
Storage	1 x SATA 3Gb/s 1 x SATA 6Gb/s
Expansion Slots	

Expansion Slots	PCIe signal and PCI signal via golden finger
Watchdog Timer	
Watchdog Timer	Software programmable supports 1~255 sec. system reset

## Ordering Information

PICOe-HM650-R10	Half-size PCIe CPU card supports 32nm Socket G2 Intel® mobile Core™ i7/i5/i3 CPU per Intel® HM65 PCH,VGA/LVDS,Dual PCIe GbE,SATA 6Gb/s and HD Audio,RoHS
-----------------	--

## Packing List

1 x PICOe-HM650 single board computer	2 x SATA cable
1 x Dual RS-232 cable	1 x Mini jumper pack
1 x USB cable	1 x QIG