


## PE4-5S

4-slot backplane with one PCIe x16 slot and three PCIe x4 slot

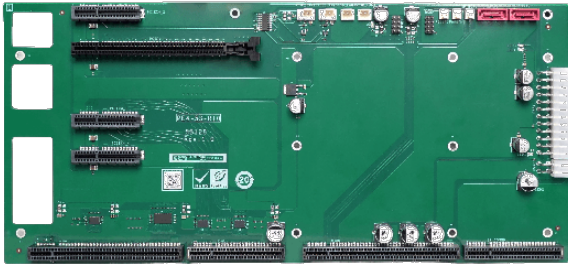

### Features

- » PICMG 1.3 4-slot backplane for flexible system integration
- » PCIe slots for high-performance expansion
- » Wide operating temperature range for industrial environments

### Specifications

|                       |   |
|-----------------------|---|
| Form Factor           |   |
| Form Factor           | PICMG1.3                                |
| Storage               |   |
| Storage               | 2 x SATA                                |
| I/O Interface         |   |
| I/O Interface         | 4 x Internal USB 2.0 : p=2.54mm         |
| Expansion             | 1 x PCIe x16 (with PCIe Gen4 x8 signal) |
|                       | 3 x PCIe x4 (with PCIe Gen4 x4 signal)  |
| Power                 |   |
| Power Supply          | 24 + 4 pin ATX                          |
| Environment           |   |
| Operating Temperature | -10°C ~ 60°C                            |
| Storage Temperature   | -30°C ~ 70°C                            |
| Humidity              | 5% ~ 95%, non-condensing                |

### Ordering Information

|            |   |
|------------|---|
| PE4-5S-R10 | 5-slot backplane with three PCIe x4 slots and one PCIe x16 slot |
|------------|---|