


# ACE-A140A

400 W PS/2 ATX Power Supply with ErP

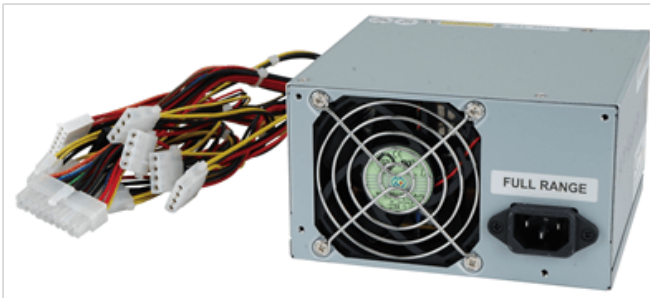

## Features

400 W PS/2 ATX Power Supply with ErP

## Specifications

General	
Dimensions	140 x 150 x 86
Efficiency	85%
MTBF	100,000
Operating temperature	-5°C ~ 50°C
Output Connector	1 x 20-pin ATX, 1 x 4-pin 12V CPU, 8 x HDD/CDROM, 2 x FDD, 1 x Extra +5V (P10)
Storage temperature	-20°C ~ 80°C
Watt	400W
Input	
Voltage	90~264 VAC Full Range
Frequency	47 Hz ~ 63 Hz
Input Current	6A (RMS)@115VAC, 3A (RMS)@230VAC
Inrush Current	65A max. for 115VAC 147A max. for 230VAC
Output	
Voltage	+3.3V/21A,+5V/20A,+12V1/16A,+12V2/16A,-12V/0.5A,-5V/0.3A,+5Vsb/3A
Over Voltage Protection	5V: 5.5V-6.82V +12V1 and +12V2: 13.4V-15.6V 3.3V: 3.5V-4.5V
Short Circuit Protection	+3.3V, +5V, +12V or -12V shutdown and latch off

## Ordering Information

ACE-A140A-S-R11	400W PS/2 ATX Power Supply with ERP & on/off switch,CCL;RoHS
ACE-A140A-R11	400W PS/2 ATX Power Supply with ERP,CCL,RoHS