


IMBA-Q470

ATX motherboard supports LGA1200 Intel® 10/11th Generation Core™ i9/i7/i5/i3, Celeron® and Pentium® processor, DDR4, triple independent displays, dual 2.5GbE LAN, M.2, USB 3.2, SATA 6Gb/s, HD Audio and RoHS

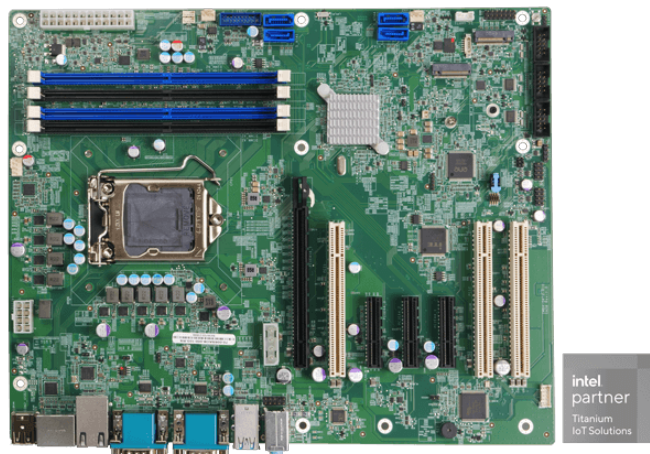

Features

- » LGA1200 Intel® 10/11th Generation Core™ i9/i7/i5/i3, Celeron® and Pentium® processor
- » Dual-channel DDR4 2933MHz
- » Support HDMI™, DP, VGA
- » Support M.2 A key for WLAN expansion, M key for PCIe NVMe storage

Specifications

| | |
|-----------------------------|--|
| Form Factor | |
| Form Factor | ATX Motherboard |
| System | |
| CPU | LGA1200 Intel® 10/11th Generation Core™ i9/i7/i5/i3, Celeron® and Pentium® processor |
| Chipset | Intel® Q470/Q470E |
| Memory | Four 288-pin 2933 MHz Dual-Channel DDR4 SDRAM Unbuffered DIMMs supported up to 128GB |
| Memory Max. | up to 128GB |
| Cooling method / System Fan | 1 x CPU fan connector (1x4 pin) |
| | 2 x System fan connector (1x3 pin) |
| Physical Characteristics | |
| Dimensions (LxWxH) (mm) | 244mm x 305mm |
| Net Weight | GW:1200g / NW:700g |
| Storage | |
| Storage | 4 x SATA |
| | 1 x M.2(NGFF) : 1 x M.2 M Key (2240/2280) with PCIe x4 |
| I/O Interface | |
| Display Output | 1 x VGA Up to 1920 x 1080 @60Hz |
| | 1 x HDMI™ |
| | 1 x Display Port |
| Ethernet | 2 x LAN : |
| | LAN1: Intel® I225V 2.5GbE controller |
| | LAN2: Intel® I225V 2.5GbE controller |
| Audio | 1 x Line in |
| | 1 x Line out |
| | 1 x Mic |
| | 1 x Front Audio : 2x5 pin |
| I/O Interface | 2 x External RS-232 |
| | 1 x External RS-422/485 : RS-485 support AFC |
| | 2 x Internal RS-232 : 2x5 pin, P=2.54 |
| | 1 x Internal RS-232/422/485 : 2x5 pin, P=2.54 ,RS-485 support AFC |

| | |
|-----------------------|--|
| | 2 x External USB 2.0 : Type-A |
| | 2 x External USB 3.2 Gen1x1 : 5Gb/s(Type-A) |
| | 5 x Internal USB 2.0 : 2x4 pin, P=2.54 |
| | 2 x Internal USB 3.2 Gen1x1 : 2x10 pin, p=2.0 |
| | 1 x DIO : 8-bit digital I/O (2x5 pin) |
| | 2 x External USB 3.2 Gen2x1 : 10Gb/s (Type-A) |
| Expansion | 1 x PCIe x16 |
| | 3 x PCIe x4 |
| | 3 x PCI Slot |
| | 2 x M.2(NGFF) : 1 x M.2 M-key 2242/2280 (PCIe x4) 1 x M.2 A-key 2230 (PCIe x1 / USB 2.0) |
| Power | |
| Power Consumption | 3.3V@1.36A, 5V@14.16A, 12V@7.5A |
| | (Intel® Core™ i9-10900E CPU with four 32 GB 3200 MHz DDR4 memory) |
| Power Supply | ATX/AT power supply |
| | Support AT/ATX mode |
| | ErP/EuP Compliant |
| Environment | |
| Operating Temperature | 0°C – 60°C |
| Storage Temperature | -30°C – 70°C |
| Humidity | 5% ~ 95%, non-condensing |
| Certifications | |
| Safety & EMC | CE/FCC compliant |

Ordering Information

| | |
|---------------|--|
| IMBA-Q470-R11 | ATX motherboard supports LGA1200 Intel® 10th/11th Generation Core™ i9/i7/i5/i3, Celeron® and Pentium® processor, DDR4, triple independent displays, dual 2.5GbE LAN, M.2, USB 3.2, SATA 6Gb/s, HD Audio and RoHS |
|---------------|--|



Packing List

| | |
|-------------------------------------|----------------|
| 1 x IMBA-Q470 single board computer | 2 x SATA cable |
| 1 x I/O shielding | 1 x QIG |

Options

| | |
|-------------------------------------|---|
| CF-115XA-R10 | High-performance LGA1155/1156/1200 cooler kit, 1U chassis compatible, 73W |
| CF-1156C-R20 | LGA1155/1156/1200 cooler kit, 1U chassis compatible, 45W |
| CF-1156D-R30 | LGA1155/1156/1200 cooler kit, 1U chassis compatible, 65W |
| CF-115XE-R10 | High-performance LGA1155/1156/1200 cooler kit, 95W |
| CB-USB02 | Dual port USB cable with bracket, 300mm, P=2.54 |
| 19800-010500-200-RS | USB 3.0/USB3.2 cable 450mm with bracket, P=2.0 |
| 19800-020100-100-RS | RS-232 cable, 230mm, P=2.54 |
| 32102-000100-200-RS | SATA power cable, MOLEX 8981-4M to SATA15P, 150MM |



Built for High-performance Edge Computing

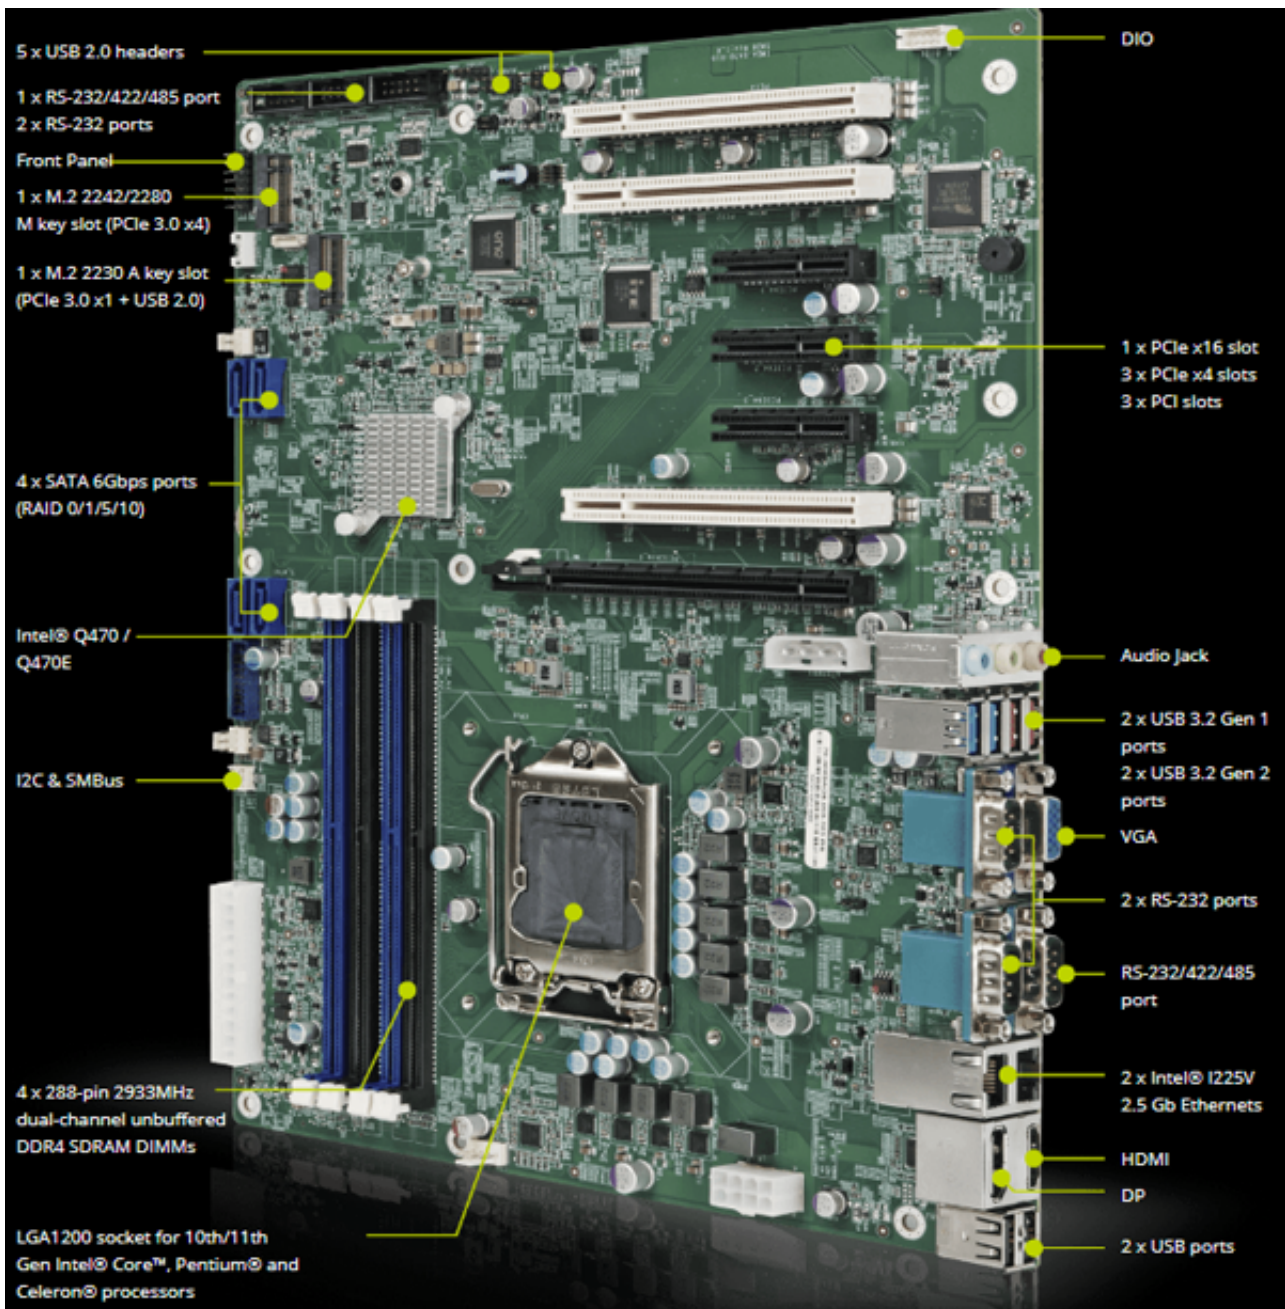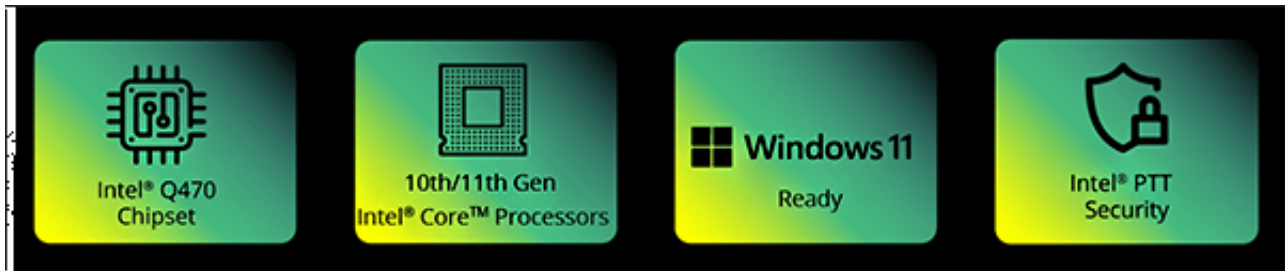

10th Gen/11th Gen Intel® Core Processors


The IEI IMBA-Q470 motherboard supports both 10th and 11th Gen Intel® Core processors, and the performance boosts up to 80% better than previous generation on i5 processor. The 10th Gen Intel® Core platform supports up to 10 cores and improved performance over Coffee Lake-Refresh. With increased I/O capacity and the latest DDR4-2933 memory support, these processors deliver the performance required to consolidate industrial multiple workloads.

Because of the above features, the IMBA-Q470 is suitable for edge computing, industrial automation, medical equipment, machine vision, automated test equipment and much more.

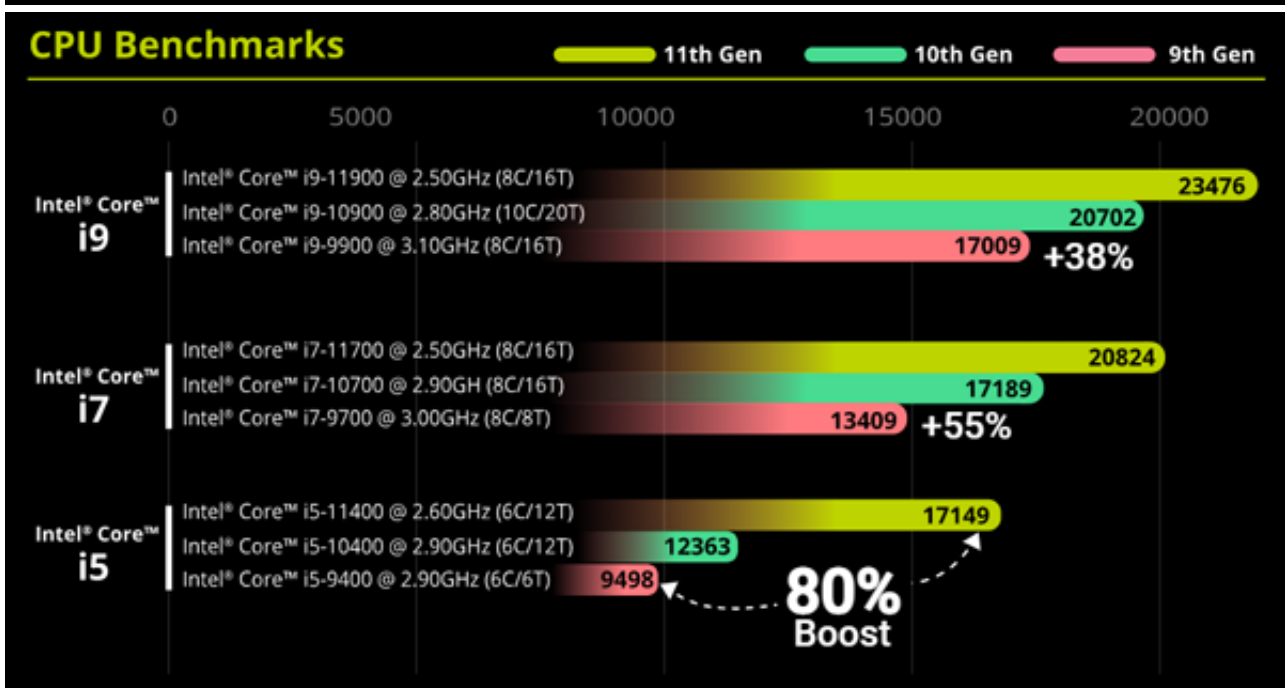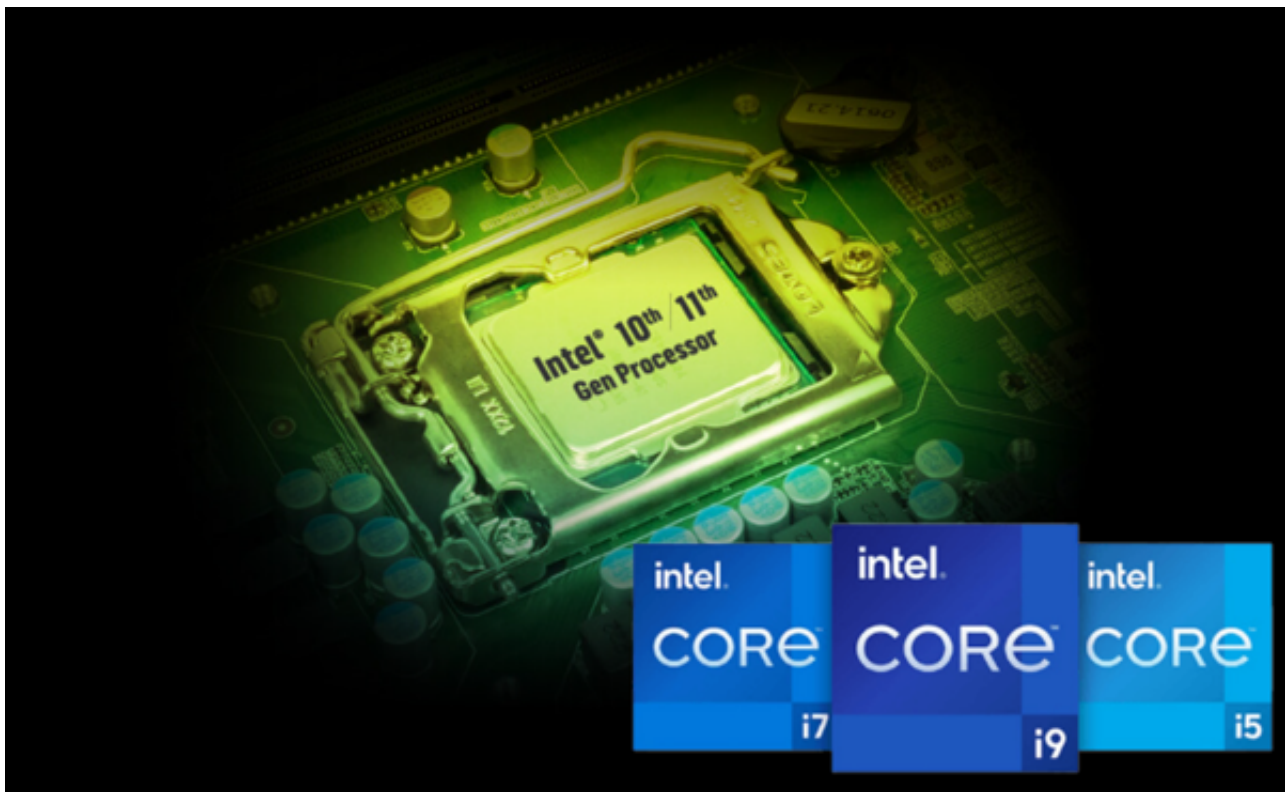


10th Gen Intel® Embedded CPU Support List

Up to 10 cores / 20 threads in LGA1200 socket

| Sockets | Brand | Process | Cores/Threads | CPU | Processor Base Frequency | Cache | TDP | Processor Graphics | Graphics Base Frequency | Memory Types | Chipset |
|---|----------|-------------------|---------------|------------|--------------------------|-------|-----|-------------------------|-------------------------|--------------|---------|
|  | Core™ i9 | 14nm Comet Lake-S | 10/20 | I9-10900E | 2.8 GHz | 20MB | 65W | Intel® UHD Graphics 630 | 350 MHz | DDR4-2933 | Q470 |
| | | | 10/20 | I9-10900TE | 1.8 GHz | 20MB | 35W | | | DDR4-2933 | |
| | Core™ i7 | | 8/16 | I7-10700E | 2.9 GHz | 16MB | 65W | | | DDR4-2933 | |
| | | | 8/16 | I7-10700TE | 2.0 GHz | 16MB | 35W | | | DDR4-2933 | |
| | Core™ i5 | | 6/12 | I5-10500E | 3.1 GHz | 8MB | 65W | | | DDR4-2666 | |
| | | | 6/12 | I5-10500TE | 2.3 GHz | 8MB | 35W | | | DDR4-2666 | |
| | Core™ i3 | | 4/8 | I3-10100E | 3.2 GHz | 9MB | 65W | | | DDR4-2666 | |
| | | | 4/8 | I3-10100TE | 2.3 GHz | 9MB | 35W | | | DDR4-2666 | |
| | Pentium® | | 2/4 | G6400E | 3.8 GHz | 4MB | 58W | | | DDR4-2400 | |
| | | | 2/4 | G6400TE | 3.2 GHz | 4MB | 35W | | | DDR4-2400 | |
| | Celeron® | | 2/2 | G5900E | 3.2 GHz | 2MB | 58W | | | DDR4-2400 | |
| | | | 2/2 | G5900TE | 3.0 GHz | 2MB | 35W | | | DDR4-2400 | |


Stunning 4K Resolution and Triple Display

The IMBA-Q470 is equipped with Intel® UHD Graphics to display videos and images in stunning 4K resolutions. Among its three independent display ports (VGA+HDMI™+DP), the HDMI™ and DisplayPort can both support up to 4K high resolution. The enhanced visual quality responses the high precision demand of users.

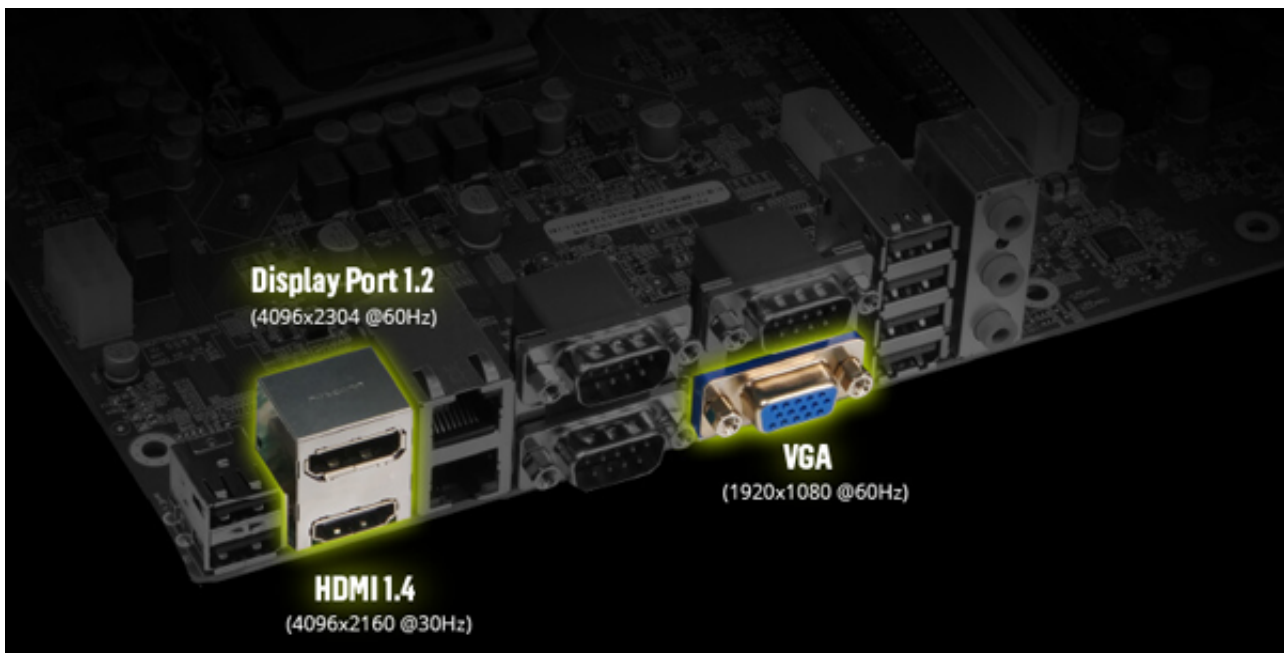

Dual Intel® 2.5G Ethernet

The IMBA-Q470 is equipped with two Intel 2.5GbE controllers, which are ready for the latest-performance router. With two 2.5GbE ports owning the benefits of low-latency, high-throughput and cost-effective, the IMBA-Q470 can meet the bandwidth-intensive requirements such as large file transfers and high resolution video streaming, which is ideal for machine vision and AI edge computing applications.

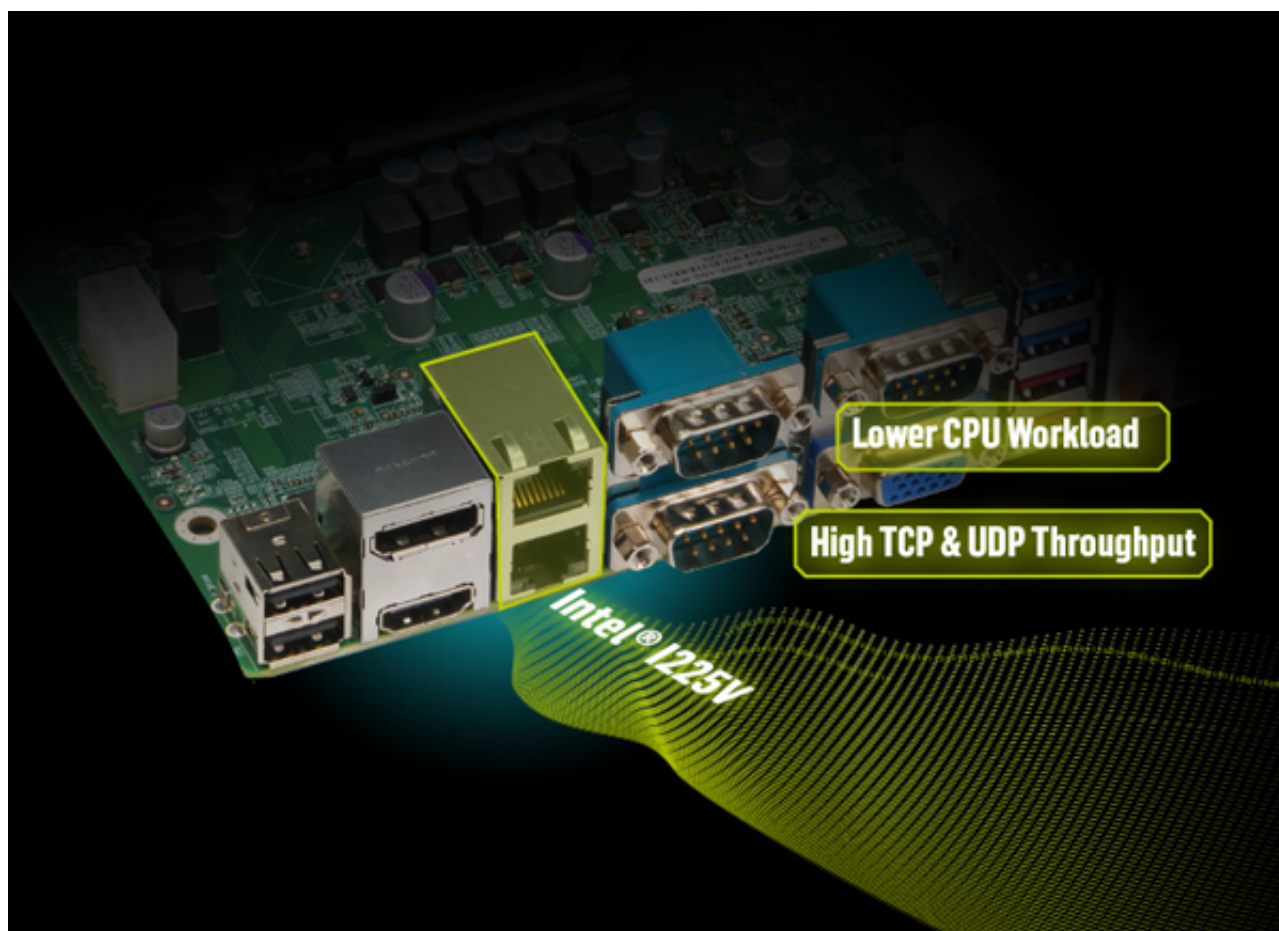



Theoretical Performance

| | |
|-----------------|-----------|
| USB 2.0 | 0.48 Gbps |
| USB 3.2 Gen 1x1 | 5 Gbps |
| USB 3.2 Gen 2x1 | 10 Gbps |

2x FASTER

USB 3.2 Gen 2x1 10 Gb/s

Two USB 3.2 Gen 2x1 (10 Gb/s) ports are integrated to support high density data transmission.

M.2 M Key

M.2 A Key

M.2 M Key for NVME SSD

The M.2 2242/80 M-key socket with PCI Express® 3.0 x4 bandwidth supports up to 32Gbps data-transfer speeds. It's the perfect choice for installing an operating system or application drive to provide fast data access.


| Interface | Transfer Rate |
|-----------------|-------------------|
| M.2 SATA 6Gb/s | 6Gb/s |
| M.2 PCIe 2.0 x2 | 10Gb/s |
| M.2 PCIe 3.0 x2 | 16Gb/s |
| M.2 PCIe 2.0 x4 | 20Gb/s |
| M.2 PCIe 3.0 x4 | Mainstream 32Gb/s |

M.2 A Key for Wi-Fi/Bluetooth

The M.2 2230 A-key socket supports PCIe/USB mode for creating a fast, cost-effective Wi-Fi 6 and Bluetooth 5.2 solution.

PCIe x16/4 & PCI Expansion Slots

There is an array of expansion interfaces on the IMBA-Q470 to meet different demands of each customer. It supports up to three PCI, three PCIe x4, and one PCIe x16 slot, which can be used to install a variety of interface cards, including motion control cards, frame grabber cards, video capture cards, I/O cards, communication cards, AI accelerator cards and GPGPU cards.

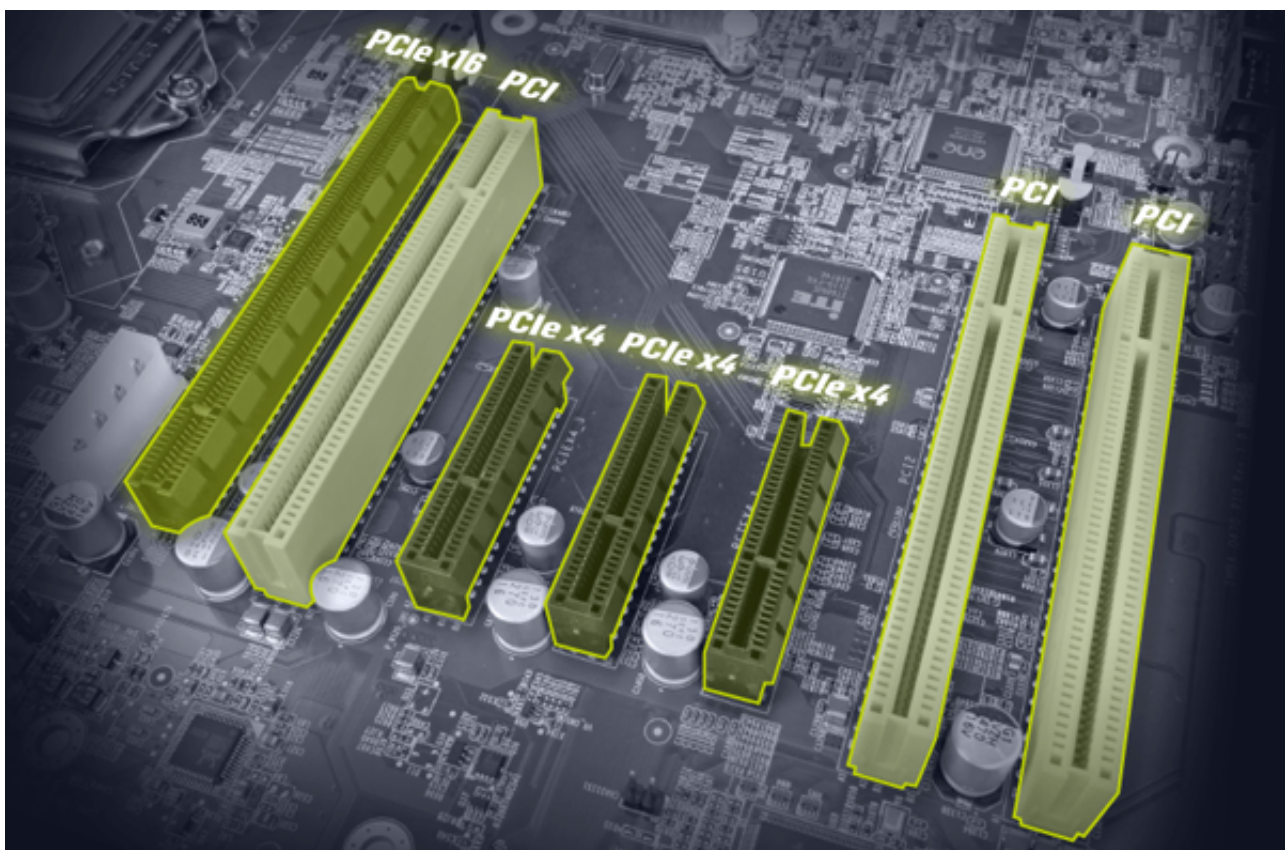

Ready for Windows 11

To comply with Windows 11, IEI BIOS enables Intel firmware-based TPM function, Intel® PTT. TPM can be leveraged to encrypt your storage drive. This protects your data, including your identity and operating system files. Encryption also protects your data in the case of physical theft.