


Alimentation > Alimentation redondante

# 63050-040300-020-RS

## 300 W ATX Mini Redundant Power Supply

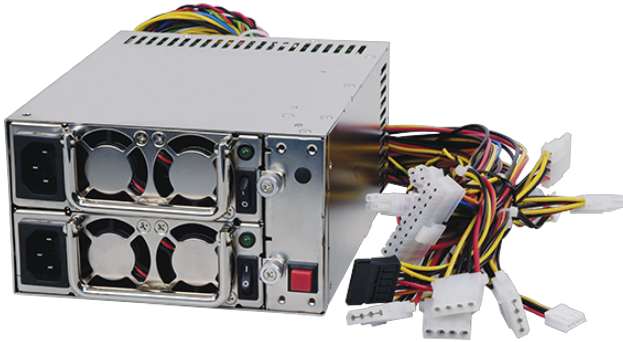

### Features

300 W ATX Mini Redundant Power Supply

### Specifications

Input	
Voltage	90 ~ 264 VAC Full Range
Frequency	47 Hz ~ 63 Hz
Input Current	6 A (RMS) @110 VAC, 3 A (RMS) @220 VAC
Inrush Current	60 A max. for 110 VAC, 80 A max. for 220 VAC
Output	
Voltage	+3.3V/18A,+5V/25A,+12V/16A,-5V/0.5A,-12V/0.5A,+5Vsb/2A
General	
Watt	300W
Efficiency	65%
MTBF	160,000
Operating temperature	0°C ~ 50°C
Storage temperature	-20°C ~ 80°C
Dimensions	185 x 150 x 86 (mm), 7.28 x 5.91 x 3.39 (inch)
Output Connector	1 x 20+4-pin ATX, 1 x 4-pin 12V CPU, 8 x HDD/CDROM, 2 x FDD, 2 x SATA, 1 x Buzzer reset, 1 x T.T.L signal, 1 x LED power

### Ordering Information

63050-040300-030-RS	Redundant Power;ZIPPY;MRT-6300P-R;B000480109;Vin:90~264VAC;300W;Vout:5VDC/12VDC/-12VDC/3.3VDC/5VSB;ATX;CCL;RoHS
63050-040300-020-RS	Redundant Power;ZIPPY;MRT-6300P;B000460166;Active PFC;Vin:90~264VAC;300W;150*185*86mm;Vout:ATX;ATX;CCL;RoHS