


ICE-CV-D25502/N26002

COM Express Rev 2.0 Basic/Compact Type 2 Modules, Intel® Atom™ D2550 Processor

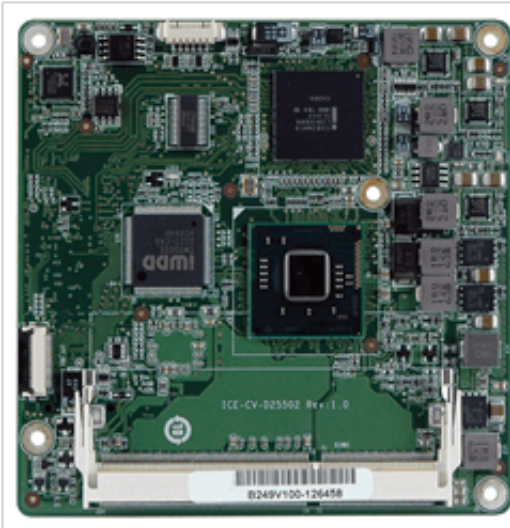

Features

- » Intel® Atom™ N2600/D2550 processors supported
- » Intel® GMA integrates high-performance graphics and media processing
- » Support DDR3 & DDR3L (1.35V) 1066/800 MHz, up to 4 GB
- » 18/24-bit single-channel LVDS, analog CRT
- » IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

Display	Display Output
System	CPU
Chipset	Intel® NM10
Memory Max.	Intel® Atom™ D2550 dual-core processor 1.86 GHz/512 x 2 L2 cache (system max. 4 GB)
	Supports 1.35V DDR3L
Storage	
I/O Interface	Ethernet
Digital I/O	
Expansion	3 x PCIe x1 signal to baseboard
Infrared Interface	
I/O Interface	
Power	Power consumption
Environment	Operating Temperature
Humidity	5% ~ 95%, non-condensing

Ordering Information

ICE-CV-D25502-R10	COM Express Rev 2.0 Compact Type 2 Module, Intel Atom D2550 Processor, DDR3, VGA/LVDS, GbE, SATAII, USB, PCI and Audio, RoHS
ICE-CV-N26002-R10	COM Express Rev 2.0 Compact Type 2 Module, Intel Atom N2600 Processor, DDR3, VGA/LVDS, GbE, SATAII, USB, PCI and Audio, RoHS
ICE-CV-N28002-R10	COM Express Rev 2.0 Compact Type 2 Module, Intel Atom N2800 Processor, DDR3, VGA/LVDS, GbE, SATAII, USB, PCI and Audio, RoHS