


# MPCIIE-UART-KIT02

PCI Express Mini Card Supports Dual-port RS-232/422/485, 16-bit GPIO, Full Size

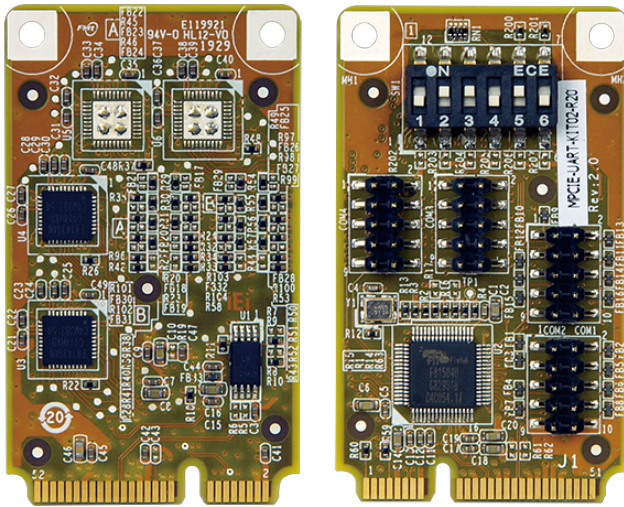

## Features

- » PCI Express Mini supports dual RS-232/422/485 and 16-bit GPIO ports
- » 128 bytes transmit/receive FIFO
- » High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- » Baud rate supports 115.2K, max. up to 1.5M
- » All GPIO supports digit IO for input/output control, output data control, input status
- » Support High/Low Level/Pulse, Open Drain/Push Pull function selection

## Specifications

Form Factor	
Form Factor	PCI Express Mini Card
Physical Characteristics	
Dimensions (LxWxH) (mm)	51 X 30
Net Weight	50g
Environment	
Operating Temperature	0°C ~ 60°C
Storage Temperature	-10°C ~ 70°C
Humidity	5% ~95%, non-condensing
Certifications	
Safety & EMC	CE/FCC compliant
Card Slot Interface	
PCIe	Mini card

## Ordering Information

MPCIIE-UART-KIT02-R20	PCI Express Mini supports Dual RS-232/422/485 , 16 bit GPIO module, Full size, RoHs
E-MPCIIE-UART-KIT02-R20	PCI Express Mini supports Dual RS-232/422/485 , 16 bit GPIO module, Full size, for E-Window, RoHs