


# 63050-040300-020-RS

300 W ATX Mini Redundant Power Supply

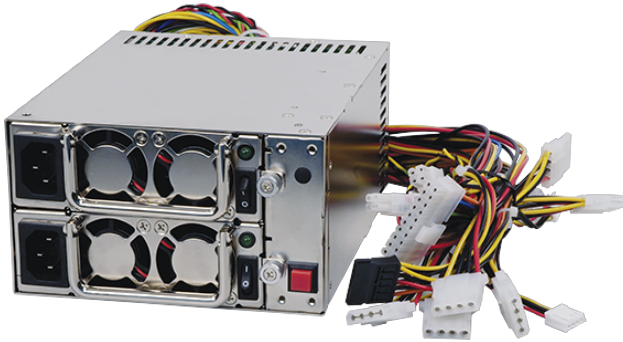

## Features

300 W ATX Mini Redundant Power Supply

## Specifications

| Input                 |  |
|-----------------------|--|
| Voltage               | 90 ~ 264 VAC Full Range  |
| Frequency             | 47 Hz ~ 63 Hz  |
| Input Current         | 6 A (RMS) @110 VAC, 3 A (RMS) @220 VAC   |
| Inrush Current        | 60 A max. for 110 VAC, 80 A max. for 220 VAC   |
| Output                |  |
| Voltage               | +3.3V/18A,+5V/25A,+12V/16A,-5V/0.5A,-12V/0.5A,+5Vsb/2A   |
| General               |  |
| Watt                  | 300W   |
| Efficiency            | 65%  |
| MTBF                  | 160,000  |
| Operating temperature | 0°C ~ 50°C   |
| Storage temperature   | -20°C ~ 80°C   |
| Dimensions            | 185 x 150 x 86 (mm), 7.28 x 5.91 x 3.39 (inch)   |
| Output Connector      | 1 x 20+4-pin ATX, 1 x 4-pin 12V CPU, 8 x HDD/CDROM, 2 x FDD, 2 x SATA, 1 x Buzzer reset, 1 x T.T.L signal, 1 x LED power |

## Ordering Information

|                     |   |
|---------------------|---|
| 63050-040300-030-RS | Redundant Power;ZIPPY;MRT-6300P-R;B000480109;Vin:90~264VAC;300W;Vout:5VDC/12VDC/-12VDC/3.3VDC/5VSB;ATX;CCL;RoHS |
| 63050-040300-020-RS | Redundant Power;ZIPPY;MRT-6300P;B000460166;Active PFC;Vin:90~264VAC;300W;150*185*86mm;Vout:ATX;ATX;CCL;RoHS     |