


# MPCIE-CAN

## USB to dual isolated CANbus 2.0B Module

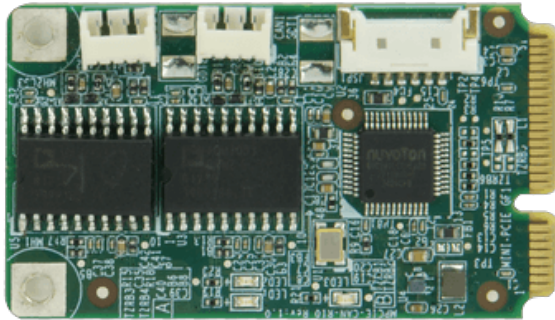

### Features

- » PCI Express Mini Card full-size
- » Minipcie interface (USB interface)
- » Supports 2 x CANBus 2.0B port module with isolating
- » Communication Baud Rate: 50/125/250/500/1000K @ 40meter
- » OS support: Windows /Linux

### Specifications

|                          |   |
|--------------------------|---|
| Form Factor              |   |
| Form Factor              | PCI Express Mini Card                                 |
| Physical Characteristics |   |
| Dimensions (LxWxH) (mm)  | 30 X 50.9 X 6   |
| Net Weight               | 50g   |
| Environment              |   |
| Operating Temperature    | -20°C ~ 60°C  |
| Storage Temperature      | -30°C ~ 70°C  |
| Humidity                 | 5% ~95%, non-condensing                               |
| Certifications           |   |
| Safety & EMC             | Complies with EN61000-4-5 2.5kV Surge protection      |
|                          | Complies with IEC 60950-1:2005 + A1: 2009 + A2:2013   |
|                          | 2.5kV HiPOT protection                                |
|                          | Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV |
| Card Slot Interface      |   |
| PCIe                     | miniPCIe full-size                                    |

### Ordering Information

|               |  |
|---------------|--|
| MPCIE-CAN-R10 | PCI Express Mini Dual CAN Bus module, Full size, RoHs, R10 |
|---------------|--|

### Packing List

|                      |               |
|----------------------|---------------|
| 1 x MPCIE-CAN module | 2 x DP9 cable |
| 1 x QIG              |               |