


# AFL3-MF-RFID-KIT

13.56MHz Mifare RFID Reader Kit

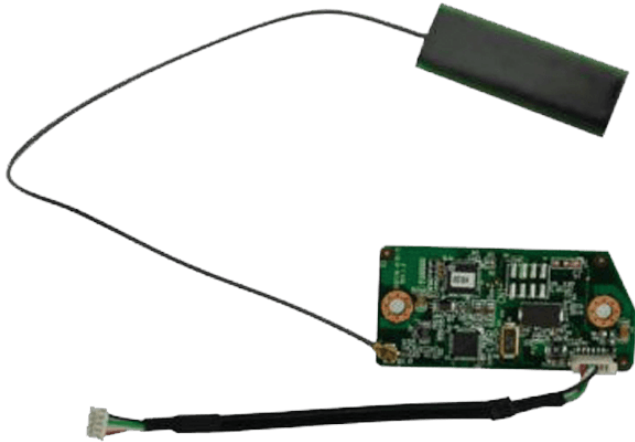

## Features

- \* Reading distance: up to 30mm
- \* Frequency: 13.56 MHz
- \* Support ISO14443A read, ISO15693 read/write ,Mifare DESFire EV1 8k
- \* USB interface
- \* Support RFID software development tool
- \* AFL3-MF-RFID-KIT01 for AFL3-W07A-BT
- \* AFL3-MF-RFID-KIT02 for AFL3-BT and AFL3-AL series, except to AFL3-W07A

## Specifications

Environment	
Operating Temperature	0°C ~ 50°C
Storage Temperature	-10°C ~ 70°C
General	
Dimensions	22mmX 50mm X7mm
Description	
Description	* AFL3-MF-RFID-KIT01 for AFL3-W07A-BT
	* AFL3-MF-RFID-KIT02 for AFL3-BT and AFL3-AL series, except to AFL3-W07A
Interface	
Interface	USB 2.0 full speed with 3.3/5V logic levels
Key Features	
Key Features	* Reading distance: up to 30mm
	* Frequency: 13.56 MHz
	* Support ISO14443A read, ISO15693 read/write ,Mifare DESFire EV1 8k
	* USB interface
	* Support RFID software development tool

## Ordering Information

AFL3-MF-RFID-KIT02-R10	AFL3 PPC Mifare RFID reader kit, for AFL3-BT / AFL3-AL / AFL3-ULT3 , R10
AFL3-MF-RFID-KIT01-R10	AFL3 PPC Mifare RFID reader kit, for AFL3-W07A-BT , R10