


# PPC2-CW133-EHL

13.3" Fanless Panel PC with Intel® Celeron® Processor J6412

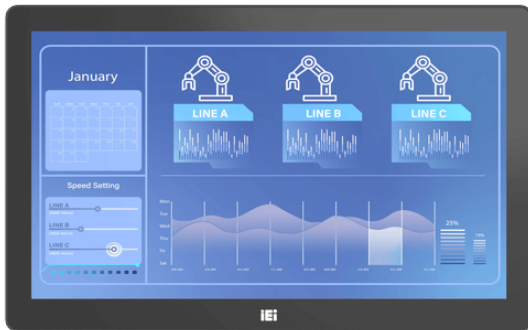

## Features

- » Intel® Elkhart Lake Platform
- » Dual M.2 (M.2 B Key & M.2 M Key) support
- » Anti-glare and Anti-UV PCAP
- » Support Gloved and Wet Hand Operation
- » Newly Designed Panel Mount Kit

## Specifications

<b>系統</b>	
冷卻方式/系統風扇	Fanless
CPU	Intel® Celeron® Processor J6412 1.5M Cache, up to 2.60 GHz / TDP 10w
On-board Memory	8GB dual-channel on-board LPDDR4x
<b>輸出/入介面</b>	
Ethernet	2 x 2.5GbE LAN via Intel I225-V
Expansion	1 x M.2 2242/2280 B key (PCIe Gen3 x1 + USB 3.0) 1 x M.2 2242 M key (PCIe Gen3 x2)
<b>Environment</b>	
Operating Temperature	-10°C ~ 60°C
Safety & EMC	CE, FCC Class A
Humidity	10% ~ 95%@40°C, non-condensing
Storage Temperature	-20°C ~ 60°C
<b>Physical Characteristics</b>	
Color	Black
Mounting	VESA 75 Panel, Wall, Rack, Stand and Arm
<b>LCD</b>	
Size	13.3"
Resolution	1920 x 1080 (16:10)
Brightness (cd/m2)	350
Contrast Ratio	1000:1
LCD Color	16.7M
Pixel Pitch (mm)	0.153 x 0.153
Viewing Angle (H-V)	176°/176°
Backlight MTBF	50,000 hours
<b>Touch</b>	
Touch Screen	Multi-point projected capacitive type (anti-UV / anti-glare coating, support gloves) Surface hardness: ≥ 7H
Touch Controller	EETI 8X
<b>I/O Interface</b>	
I/O Interface	1 x RS-232/422/485 4 x USB 2.0 1 x HDMI™ (up to 3840*2160 @30Hz)

	2 x LAN
	1 x DC Input Jack
	1 x Reset Button
	1 x Power Switch
	1 x AT/ATX switch
	1 x Clear CMOS Button
	2 x RS-232 (by DB9)
	2 x Power In - 1 x 12V-24V DC jack 1 x Power terminal block (2-pin)
	2 x USB 3.2 Gen2x1 (10Gb/s(Type A))

## Ordering Information

PPC2-CW133-EHL-J1/8G-R10	13.3" 350 cd/cm <sup>2</sup> 1920x1080 Fanless Panel PC with Intel® Celeron® Processor J6412, TDP 10W, 8GB LPDDR4x on-board, HDMI™ output, black, 12-24V DC input, projected capacitive touchscreen with AG, R10
--------------------------	--

## Packing List

1 x PPC2-CW133-EHL	1 x Power Cord
1 x Power Adapter	1 x Panel Mount Kit
1 x QIG	1 x Screw Pack