


Power Supply > PS/2 Type Power Supply

ACE-A140B

400 W PS/2 ATX Power Supply with ErP

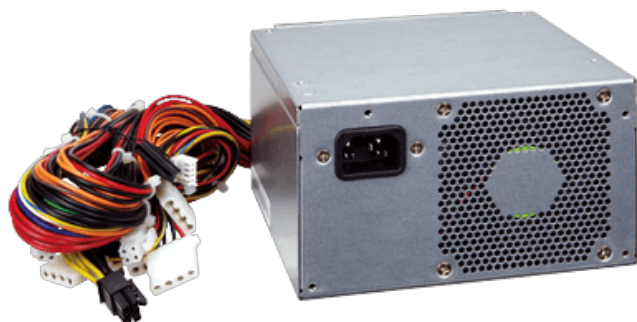

Features

400 W PS/2 ATX Power Supply with ErP

Specifications

Input	
Voltage	90~264 VAC Full Range
Frequency	47 Hz ~ 63 Hz
Input Current	5A (RMS)@115VAC, 2.5A (RMS)@230VAC
Inrush Current	80A max. for 115VAC, 160A max. for 230VAC
Output	
Voltage	+3.3V/21A,+5V/16A,+12V1/17A,+12V2/17A,-12V/0.5A,+5Vsb/3A,-5V/0.1A
Over Voltage Protection	+3.3V: 3.76V-4.3V
	+5V: 5.74V-7.0V
	+12V1 and +12V2: 13.4V-15.6V
Short Circuit Protection	+3.3V, +5V, +12V or -12V shutdown and latch off
General	
Watt	400
Efficiency	87%
MTBF	100000
Operating temperature	0°C ~ 50°C
Storage temperature	-20°C ~ 80°C
Dimensions	140 x 150 x 86
Output Connector	1 x 20+4-PIN ATX,
	2 x 4-pin 12V CPU,
	8 x HDD/CDROM,
	1 x Graphics card power,
	2 x FDD,
	2 x SATA

Ordering Information

ACE-A140B-S-R11	400W PS/2 ATX Power Supply with ERP & on/off switch,meets 80 plus(Gold);RoHS
ACE-A140B-R11	400W PS/2 ATX Power Supply with ERP,meets 80 plus(Gold),RoHS