


# IMBA-C2060

ATX motherboard supports 32nm LGA1155 Intel® Xeon® E3/Core™ i3/Celeron® CPU per Intel® C206

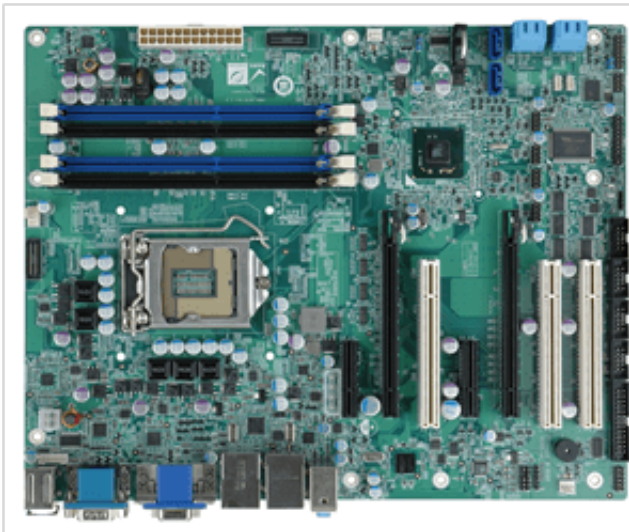

## Features

- » LGA1155 Intel® Xeon® E3 and Intel® Core™ i3 processor supported
- » Dual-channel 1333 MHz DDR3 supports up to 32 GB memory
- » Intel® PCIe GbE with Intel® AMT 7.0 support
- » Providing high-speed graphics interface by two PCIe x8/PCIe x4 add-on cards
- » USB 3.0 and SATA 6Gb/s supported
- » IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Specifications

Display	Display
System	CPU
Chipset	Intel® C206
Memory Max.	Four 240-pin 1333/1066MHz dual-channel DDR3 SDRAM ECC Registered and non-ECC unbuffered DIMM (system max. 32GB)
Storage	2 x SATA 6Gb/s 4 x SATA 3Gb/s
CPU Socket	LGA1155
I/O Interface	Ethernet
Digital I/O	8-bit digital I/O (4-bit input/4-bit output)
Audio	Realtek ALC892 HD Audio codec
I/O Interface	5 x RS-232 1 x RS-422/485 2 x USB 3.0 10 x USB 2.0 1 x LPT 1 x 4-pin wafer for SMBus 1 x 4-pin wafer for I <sup>2</sup> C 1 x PS/2 KB & MS 1 x TPM connector (2x10 pin)
Power	Power consumption
Environment	Operating Temperature
Humidity	5% ~ 95%, non-condensing
Option	iRIS
Expansion Slots	Expansion Slots

FSB	FSB
Watchdog Timer	Watchdog Timer
CPU Cooler	CPU Cooler
I/O Interface	I/O Interface
1 x RS-422/485	
1 x I <sup>2</sup> C	
4 x Internal RS-232	
1 x LPT	
2 x USB 3.0	
2 x USB 2.0	
8 x Internal USB 2.0	
1 x Internal RS-422/485	
1 x RS-232	

## Ordering Information

IMBA-C2060-R20	ATX Motherboard supports 32nm LGA1155 Intel Xeon E3 and Intel Core i3 CPU per Intel C206,DDR3,VGA/DVI/HDMI™,Dual Intel PCIe GbE,USB 3.0,SATA 6Gb/s,Audio,RoHS
----------------	---